

Start Spot IP65 3-CCT

Start Spot 620lm 3CCT DIM IP65 WH

0005510

Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	620
Luminous flux (lm)	620
Luminaire efficacy (lm/W)	95
Colour temperature (K)	3000
Correlated colour temperature range (K)	2700 - 4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Distribution type	Symmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	6.5
Mains voltage (V)	220-240V
Lamp power factor	0.6
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	96
Electrical protection	Class II
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	21
Inrush Current (A)	6
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	114
Max. products per 13A C Breaker	150
Max. products per 16A C Breaker	192
Max. products per 20A C Breaker	234
Max. products per 10A B Breaker	66
Max. products per 16A B Breaker	114

Start Spot IP65 3-CCT

Start Spot 620lm 3CCT DIM IP65 WH

0005510

Lifetime data

Lifespan L70 B50	68000
Lifespan L80 B20	39000
Lifespan L80 B10	36000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Reflector finish	None
Nominal Product Height (mm)	47
Nominal Product Diameter (mm)	87
Cutout Dimensions (W x L in mm or Diameter in mm)	68-74
Weight (kg)	0.07

Packaging


Single packaging type	Carton
Product EAN number	5410288055107
Packaging single length / height (cm)	9.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	9.0
DUN14 (inner)	25410288055101
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	7.5
Packaging inner depth (cm)	19.0
DUN14 (outer)	15410288055104
Units per outer package	48
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	40.5

Safety data


Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY


Start Spot IP65 3-CCT Start Spot 620lm 3CCT DIM IP65 WH 0005510

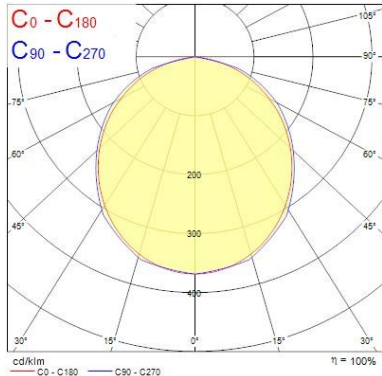

Distance [m]	Cone diameter [m]		Illuminance [lx]		
	C0 - C180 (Half beam angle: 107.0°)	C90 - C270 (Half beam angle: 111.6°)	E(0°)	E(C90)	E(C0)
0.5	1.47 1.35		896 93	55.8° 53.8°	96
1.0	2.94 2.70		225 23	55.8° 53.8°	24
1.5	4.41 4.05		100 9	55.8° 53.8°	11
2.0	5.89 5.41		56 5	55.8° 53.8°	6
2.5	7.36 6.76		36 3	55.8° 53.8°	4
3.0	8.83 8.11		26 2	55.8° 53.8°	3

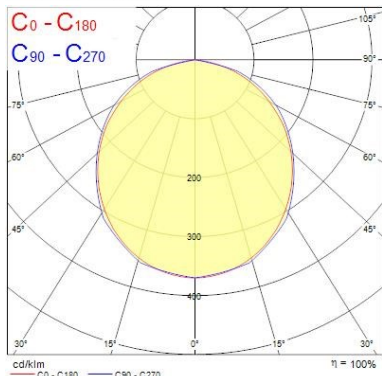

Distance [m]	Cone diameter [m]		Illuminance [lx]		
	C0 - C180 (Half beam angle: 107.2°)	C90 - C270 (Half beam angle: 110.4°)	E(0°)	E(C90)	E(C0)
0.5	1.44 1.36		933 77	55.2° 53.8°	93
1.0	2.88 2.71		238 19	55.2° 53.8°	23
1.5	4.32 4.07		99 9	55.2° 53.8°	10
2.0	5.76 5.43		62 5	55.2° 53.8°	6
2.5	7.19 6.78		33 3	55.2° 53.8°	3
3.0	8.63 8.14		23 2	55.2° 53.8°	2

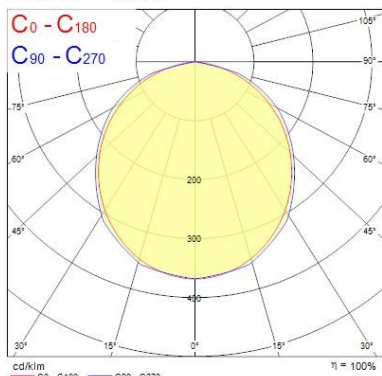

Distance [m]	Cone diameter [m]		Illuminance [lx]		
	C0 - C180 (Half beam angle: 107.2°)	C90 - C270 (Half beam angle: 111.2°)	E(0°)	E(C90)	E(C0)
0.5	1.46 1.38		907 82	55.8° 53.8°	96
1.0	2.92 2.71		227 20	55.8° 53.8°	24
1.5	4.38 4.07		101 9	55.8° 53.8°	11
2.0	5.84 5.43		67 5	55.8° 53.8°	6
2.5	7.30 6.78		36 3	55.8° 53.8°	4
3.0	8.76 8.14		26 2	55.8° 53.8°	3

TECHNICAL DRAWINGS

